

INSTALLATION INSTRUCTIONS FOR 10157-XXX-L FOR LED LINEAR CHANDELIER READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Position the mounting plate (A) onto the ceiling and mark the location of the four drywall anchors (B). Pre-drill the holes for the drywall anchors (B) and insert the drywall anchors (B) into the ceiling.
4. Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box. (Fig.3)
5. Attach the mounting plate (A) to the junction box (not included) using the mounting screws (D) (Size: 8-32*1/2"L). The side of the mounting plate (A) marked "GND" must face out.
6. Place the wood screws (C) through the mounting plate (A) and lock them into the drywall anchors (B) to secure the mounting plate (A) to the ceiling.
7. Fixture includes six 12" and two 6" rods. Determine desired hanging height and thread rods (K1/K2) to the fixture(L). Feed the fixture wire carefully through each rod.
8. Secure swivel (J) to the last section of rod (K).
9. Slide the back plate(I) onto the two swivels (J), and secure tightly with lock hex nut (F), key washer (G).
10. The support cable is provided to support the weight of the fixture while wiring. Attach hook (Z) on the end of support cable into a slot located on the mounting plate (A). Carefully allow the support cable to support the weight of the fixture while wiring.

CONNECTING THE WIRES (Fig.2)

11. The red and black input wires from the led module are marked LED+ & LED-. Connect the red output wire (marked output+) from the driver to the red wire (marked LED+) from the LED module and the black one (marked output-) to the black wire (marked LED-) from the LED module. See Fig. 2, make sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (A) using the green screw (B) provided. Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box. (Fig.3).

COMPLETING THE INSTALLATION

12. Raise the back plate(I) to mounting plate (A) and secure with screw (H).
13. Align the glass(N) over the fixture (L) and secure with screws (M) and washer.
14. Install rod (O) onto fixture (L).
15. Align the glass shade (P) over the rod (O) and secure with screws (Q).

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LED. Hold the fixture by the base or fixture body only.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.1

Set#: A-021-1120121
Mounting plate
Green screw
Wood screw (4)
Drywall anchor (4)
Mounting screw(2)

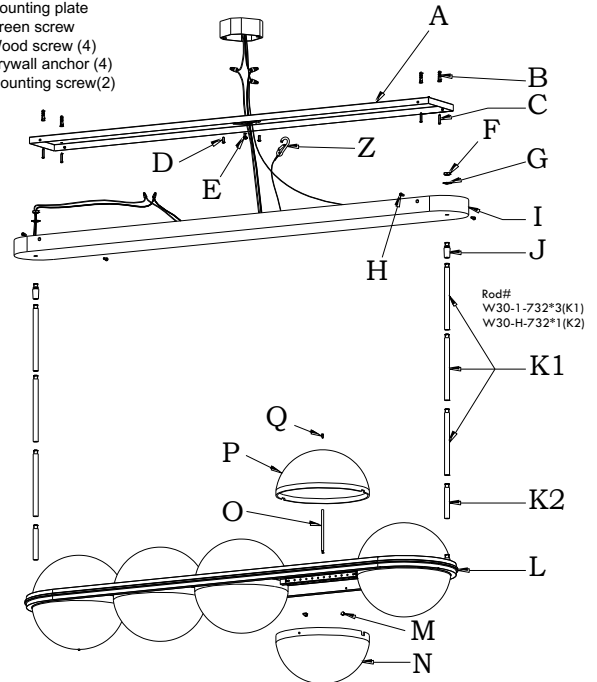


Fig.2




Fig.3

