

# INSTALLATION INSTRUCTIONS FOR 10156-XXX-L

## For LED PENDANT

### READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU**

#### ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Align the fixture (J) onto glass (L) and secure with screws (K) and plastic washer.
4. Install rod (H) onto the coupling of the fixture ring (J).
5. Carefully pass through the glass (L) onto the rod (H) and seat into the fixture ring (J).
6. Fixture includes three 12" and one 6" rods. Determine desired hanging height and thread rods (G1/G2) to all rod (H). If installing with one 6" rod only the all thread must be removed. Then feed fixture wire carefully through each rod.
7. Secure rods to the swivel (F) of the canopy (D).
8. Connect the driver to the outlet box wiring first, then place the driver into the 4" round or octagon junction box (not included). Attach the circular strap (A) to the junction box (not included) using mounting Green Screw (C) (Size: 8-32\*1/2"L). The side of the crossbar marked "GND" must face out.

#### CONNECTING THE WIRES (Fig.1 & Fig.2 & Fig.3)

9. Connect the red output wire (marked output +) from driver to the red input wire (marked LED +) from the led module. Connect the black output wire (marked output -) from driver to the black input wire (marked LED -) from led module. See Fig. 2, make sure that all wire connectors are secured.
10. Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the circular strap (A) using the green screw (B) provided.

#### COMPLETING THE INSTALLATION

11. Align the canopy (D) onto circular strap (A) and secure with screws (E).

#### Dimmable with ELV and/or LED compatible wall dimmer switches.


Your installation is now complete. Return power to the junction box and test the fixture.

**CAUTION /ATTENTION:** When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base or fixture body only.




MIN 75°C SUPPLY CONDUCTORS

**Fig.1**

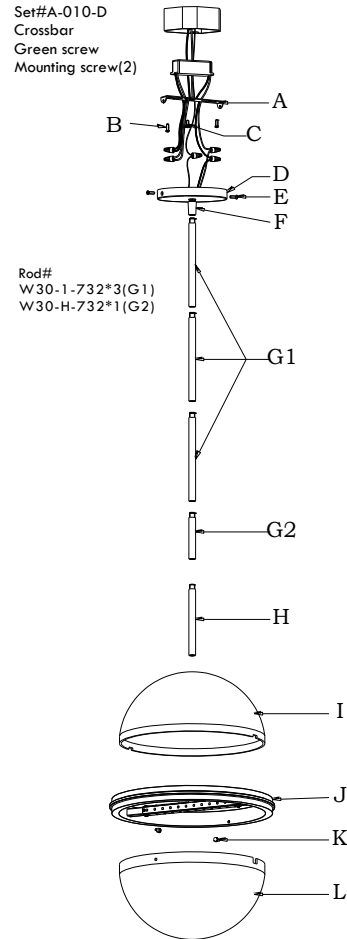

**Fig.2**

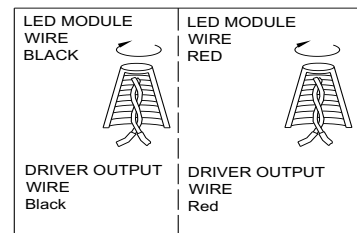

**Fig.3**

