

# INSTALLATION INSTRUCTIONS FOR 10526-XXX-L

## For LED Pendant

### READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR**

#### MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove the existing fixture and its mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Adjust strainers (M) to make the length of the safety cable reach the height of the fixing device you need, ensure Min 4" to the canopy.
4. Position the mounting plate (A) on the ceiling and mark the location of the three drywall anchors (C). Pre-drill the holes for the drywall anchors (C). Then insert the drywall anchors (C) into the ceiling.
5. Attach the mounting plate (A) to the junction box (not included) using mounting screws (D) (Size: 8-32\*1/2"L). The side of the mounting plate marked "GND" must face out.
6. Place the wood screws (E) through the holes of the mounting plate (A) and lock into the drywall anchors (C) to secure the mounting plate (C) to the ceiling

#### CONNECTION THE WIRES (Fig.2)

7. Connect the white input wire from the driver to the white wire from the junction box with wire nuts. Connect the black input wire from driver to the black wire from the junction box with wire nuts. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (A) using the green screw (B) provided.

#### FINISHING THE INSTALLATION (Fig. 1)


8. Align the canopy (G) onto mounting plate (A) and secure with screws (F).
9. Rotate the acrylic tube (I) into the holder (H).
10. Slide glass (J), metal fitting (K), (in order "J-K-J-K-J-K-J" until the whole tube is filled) onto the acrylic tube (I) and secure with the finial (L). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

**Dimmable with ELV and/or LED compatible wall dimmer switches.**

**Fig.1**

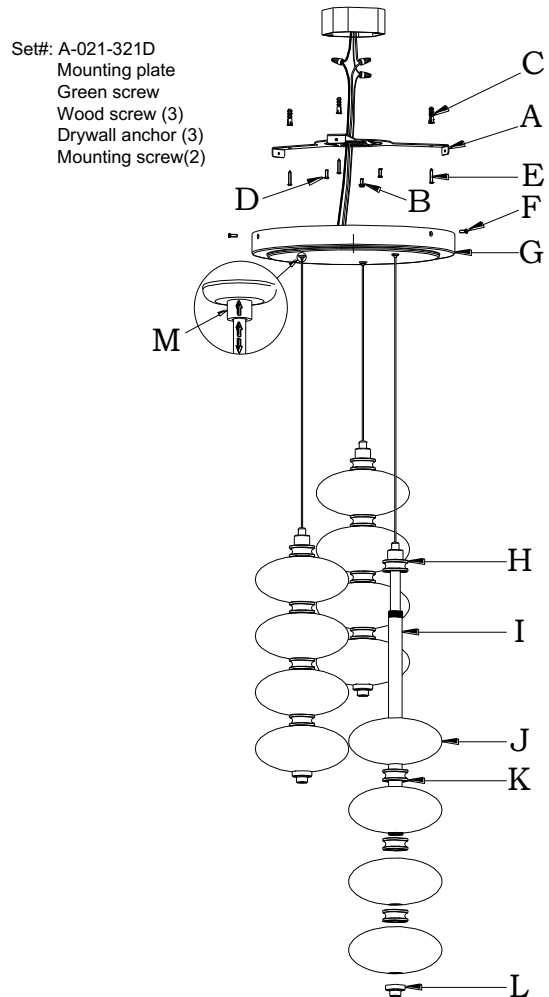

**Fig.2**

