

INSTALLATION INSTRUCTIONS FOR 10419-860-L

FOR LED CHANDELIER

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

- Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
- Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
- Position the mounting plate (A) onto the ceiling and mark the location of the four drywall anchors (D). Pre-drill the holes for the drywall anchors (D) and insert the drywall anchors (D) into the ceiling.
- Attach the mounting plate (A) to the junction box (not included) using the mounting screws (C) (Size: 8-32*1 1/2" L). The side of the mounting plate marked "GND" must face out.
- Place the wood screws (E) through the mounting plate (A) and lock them into the drywall anchors (D) to secure the mounting plate (A) to the ceiling.
- Fixture includes three 12" and one 6" rods. Determine desired hanging height and thread rods (H1/H2) to the nipple (I). If installing with one 6" rod only the all thread must be removed. Then feed fixture wire carefully through each rod.
- Secure rods to the swivel of canopy (G).
- Adjust four rods (J) to rectangle distribution so that they can fit with the fixture.
- Connect quick connector (L1/L2) carefully. Then secure the rods (J) to the fixture with screws (K).
- Connect the red output wire (marked output +) from driver to the red input wire (marked LED +) from the led module. Connect the black output wire (marked output -) from driver to the black input wire (marked LED -) from led module. See Fig. 2, make sure that all wire connectors are secured.
- The support cable is provided to support the weight of the fixture while wiring. Attach hook (Z) on the end of support cable into a slot located on the mounting plate (A). Carefully allow the support cable to support the weight of the fixture while wiring.

CONNECTING THE WIRES (Fig.3)

- Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (A) using the green screw (B) provided.
- Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION

- Align the canopy (G) onto the mounting plate (A) and secure with screws (F).
- Rotate the glass (O) to the fixture (N). Do not over tighten. Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LED. Hold the fixture by the base or fixture body only.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.1

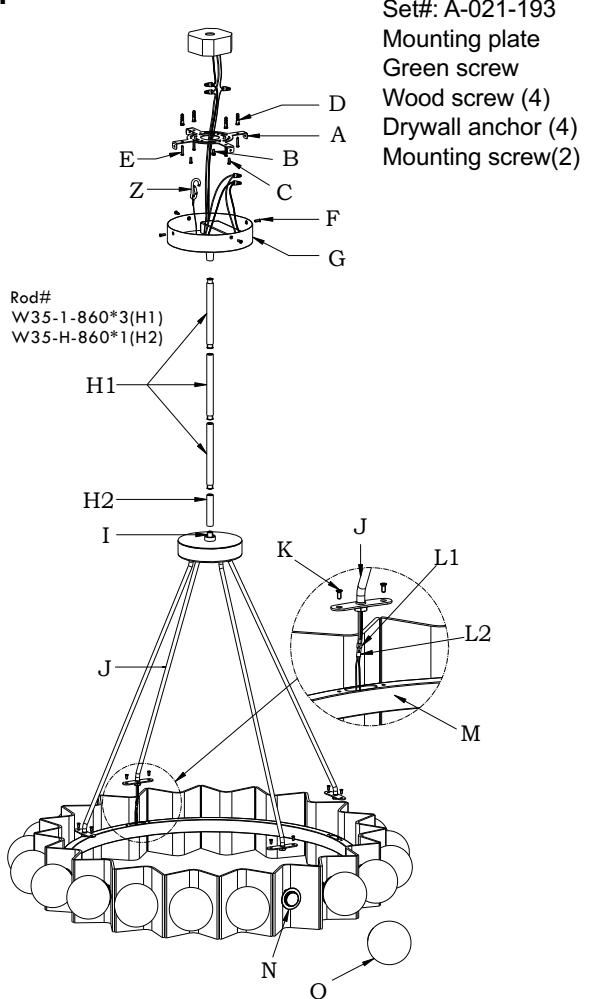


Fig.2




Fig.3

