

INSTALLATION INSTRUCTIONS FOR 2036-732-L

FOR LED PENDANT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in Figure 1.
3. Put the driver into the junction box (not included). (Note: To be installed with a 4" round or octagon junction box).
4. Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box. (Fig. 3)
5. Attach the mounting plate (A) to the junction box (not included) using the mounting screws (C) (Size: 8-32*1/2" L). The side of the mounting plate (A) marked "GND" must face out.
6. Fixture includes three 12" and one 6" rods. Determine desired hanging height and thread rods (F1/F2) to the nipple of the socket (G). If installing with one 6" rod only the all thread must be removed. Then feed fixture wire carefully through each rod.

CONNECTING THE WIRES (Fig.2)

7. Connect the red output wire (marked output +) from driver to the red input wire (marked LED +) from the led module. Connect the black output wire (marked output -) from driver to the black input wire (marked LED -) from led module. See Fig. 2, make sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (A) using the green screw (B) provided.

FINISHING THE INSTALLATION (Fig.1)

8. Align the canopy (D) onto the mounting plate (A) and secure with screws (E).
9. Slide glass (I), cap (J), cement shade (K) and metal gasket (O) onto the socket (H) and secure with acrylic shade (L).

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION/ATTENTION: When handling the fixture, do not apply pressure to the LED. Hold the fixture by the frame only.

Fig.1

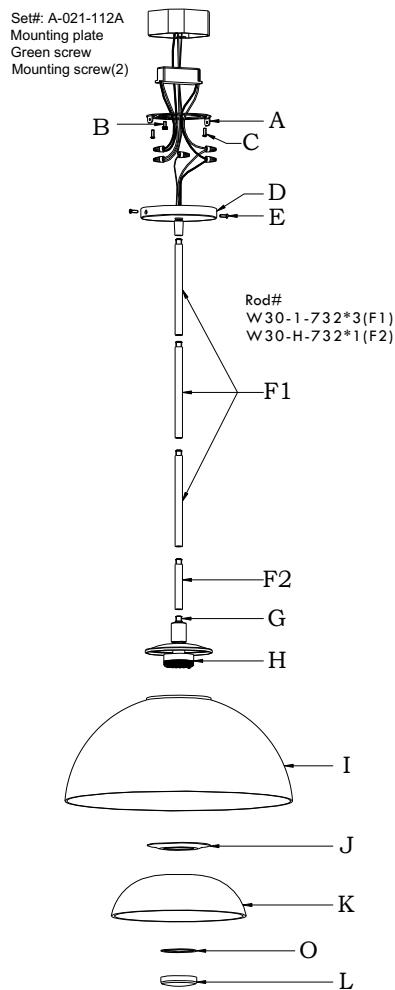


Fig.2





Fig.3

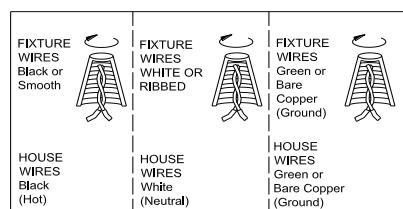

INSTALLATION INSTRUCTIONS FOR 2036-732-L

For SEMI FLUSH

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.4)

1. Shut off power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in Figure 4.
3. Put the driver into the junction box (not included). (Note: To be installed with a 4" round or octagon junction box). (Fig. 3)
4. Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box.
5. Attach the mounting plate (A) to the junction box (not included) using the mounting screws (C) (Size: 8-32*1/2" L). The side of the mounting plate (A) marked "GND" must face out.

CONNECTING THE WIRES (Fig.2)

6. Connect the red output wire (marked output +) from driver to the red input wire (marked LED +) from the led module. Connect the black output wire (marked output -) from driver to the black input wire (marked LED -) from led module. See Fig. 2, make sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (A) using the green screw (B) provided.

FINISHING THE INSTALLATION (Fig.4)

7. Loosen the hex nut (M) and remove the key washer (N) and canopy (D).
8. Lock the key washer (N) and canopy (D) to the nipple of the socket (G) with hex nut (M).
9. Align the canopy (D) onto the mounting plate (A) and secure with screws (E).
10. Slide glass (I), cap (J), cement shade (K) and metal gasket (O) onto the socket (H) and secure with acrylic shade (L).

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.4

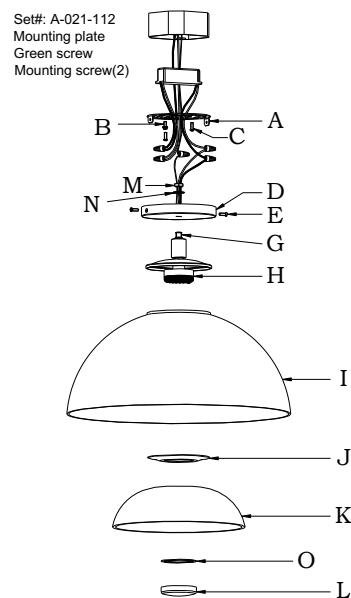


Fig.2




Fig.3

