

INSTALLATION INSTRUCTIONS

Item# 12055-732 (New.10/06/2025)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig. 1)

3. Determine the desired hanging height and thread rods (G1, G2, G3 and G4) to all thread (J). Attach canopy (D) by screwing onto rod (G1).
4. Carefully pass the wires through each rod during assembly. Also feed wire over swivel (I). After fixing the G1, G2, G3 and G4 rods, fix (F) to (G). After that, attach it to the canopy and tighten it using a hex nut.
5. Attach mounting strap (A) to the junction box (not included) with mounting screws (E). The side of the mounting plate (A) with "GND" marked on it and two convex points must face out.
6. The support cable is provided to support weight of the fixture while wiring. Align fixture to mounting plate (A) and attach hook on the end of support cable to a slot located on mounting strap (A). Carefully allow support cable (R) to support weight of fixture while wiring.

CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided.
8. Tuck the wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

9. Place canopy (D) over mounting strap (A) and secure with mounting screws (C).
10. Install (5) five medium base bulbs up to 25 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).

Your installation is now complete. Return power to the junction box and test the fixture. Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set # 12055-732

- Circular Strap
- Ground Screw
- Mounting Screw *2

Rod# 12055-732/1X6"(G1)
12055-732/3X12"(G2/G3/G4)


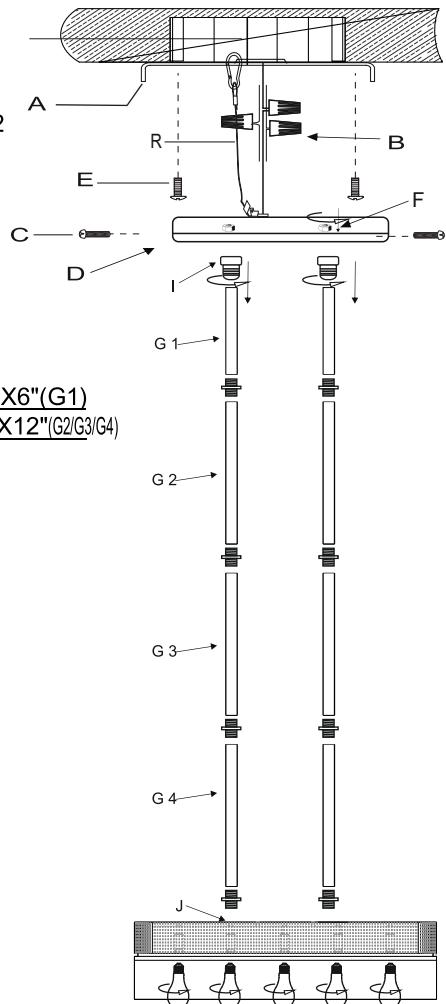


Fig. 2


FIXTURE WIRES
Black or Smooth

HOUSE WIRES
Black (Hot)



FIXTURE WIRES
White or Ribbed

HOUSE WIRES
White (Neutral)



FIXTURE WIRES
Bare Copper (Ground)

HOUSE WIRES
Green (Ground)

