

INSTALLATION INSTRUCTIONS

Item# 12416-860 (New. 2025/09/30)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Attached mounting plate (A) to outlet box (Not included) using mounting screws (B) (Size: #8-32N*L1"). The side of mounting plate (A) marked with "GND" must face out.
4. Determine the desired hanging height and thread rods (F& E) to coupling on top fixture (G). Carefully feed wires through each rod as you assemble. Note: Remove the all thread, if installing with one 6" rod only.
5. Attach fixture canopy (D) by threading onto rod (E).
6. The support cable (O) is provided to support the weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook on end of support cable (O) into a slot located on mounting plate (A). Carefully allow support cable (O) to support weight of fixture while wiring (Fig.1).

CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
8. Tuck the wire connectors neatly into outlet box.

FINISHING THE INSTALLATION (Fig.1)

9. Raise canopy (D) over mounting plate (A) and secure with screws (C).
10. Install (6) six candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
11. Thread all thread (I) to coupling of the fixture (G) and tighten with hex nut (H). Adjust hex nut position if necessary.
12. Place flat washer (J), rubber washer (K), glass shield (L), rubber washer (K), flat washer (J) over all thread (I) and secure with hex nut (M). Then screw finial (N) onto all thread (I).

Your installation is now complete. Return power to outlet box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

6" Rod# W35-H-860
12" Rod# W35-1-860

Set#

- Mounting Screw *2
- Green Screw
- Mounting Plate


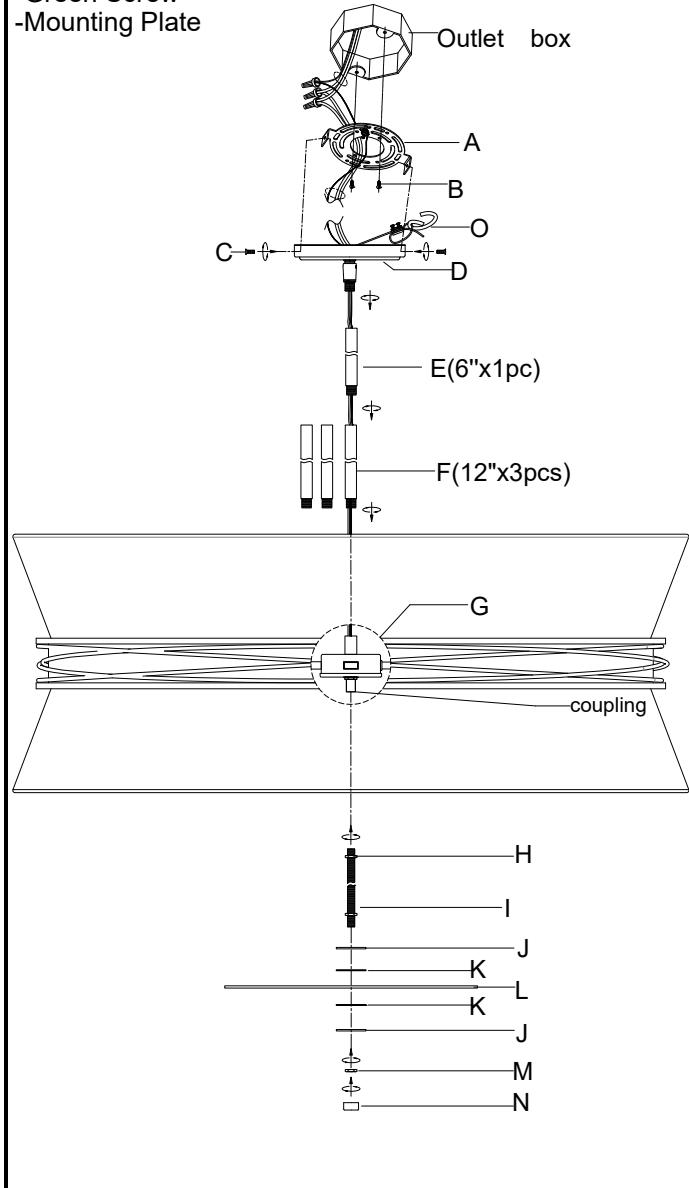


Fig. 2




Page 1/2

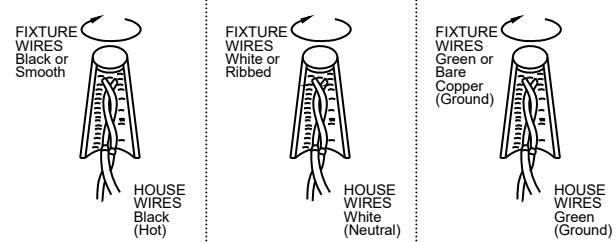

Replace swivel to be loop system (Fig.3)

1. Unscrew the nut (D4), then remove lock washer (D3), support cable (O), flat plate (D2) and swivel (D1) from the canopy (D).
2. Attach one loop (S) to another loop (S) by using quick link (T). Secure one loop (S) to rod (E).
3. Place another loop (S) over the canopy (D), then place flat plate (D2), support cable (O) and lock washer (D3) onto the protruding nipple at the top of loop (S), securing with hex nut (D4).

Fig.3

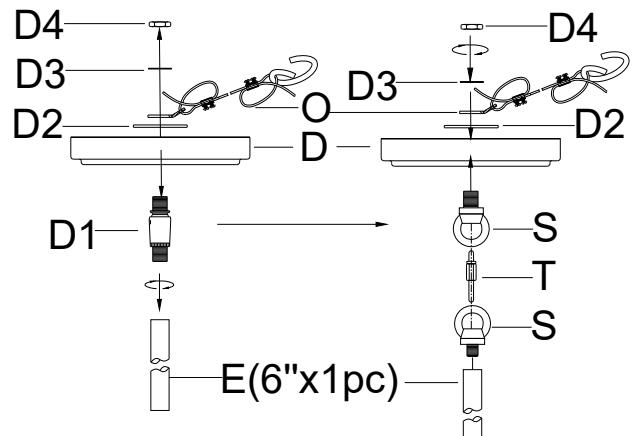

12416-860

