

# INSTALLATION INSTRUCTIONS

Item#N3678-732

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (B) over ceiling and mark location of eight holes on mounting plate (B) where plastic anchors (A) will be inserted. Drill holes into ceiling and insert plastic anchor (A).
4. Install a 1/4" IPS pipe (Y1) (not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown.
5. Secure the hex nut (Y2) onto the pipe (Y1) and then secure the hickey (Y3) tightly.
6. Feed the fixtures wires and safety cable (E) through the mounting plate (B) and allow safety cable (E) to exit through the side of hickey (Y3). Run safety cable (E) through the hickey (Y3) one circle and secure safety cable (E) with set screw assembly and set screw.
7. Attach mounting plate (B) to the junction box (not included) with mounting screws (D) (Size: #8-32N\*L1/2"). The side of the mounting plate (B) with "GND" marked on it and two convex points must face out. And install the eight wood screws (C) into the plastic anchors (A).
8. By twisting the knob in the middle of the light cluster (L), adjust it to the desire length. Lock the light cluster (L) onto the canopy (G) by using parts (I) & (J) provided. Then connect the plug (G) of the light cluster (L) to the plug (G) of the lead wire.

### CONNECTING THE WIRES (Fig. 2)

9. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting plate (B) using green screw provided.
10. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

11. Raise fixture up to ceiling, align the holes of canopy (H) with the screws on the mounting plate (B), then secure with hex nuts (F) and cap nuts (K).
12. Install (8) eight candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
13. Starting from the center, attach the chain (N13-N1) to the hook on the canopy (H) as shown in Fig.1& Fig.3. Then attach the alabaster (M) on end of the chain (N13-N1) as shown in Fig.1& Fig.3.


Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**


### Fig.1

Set#A-030-800D

- Mounting plate
- Ground screw
- Mounting screws(2)
- Wood screws(8)
- Anchors(8)

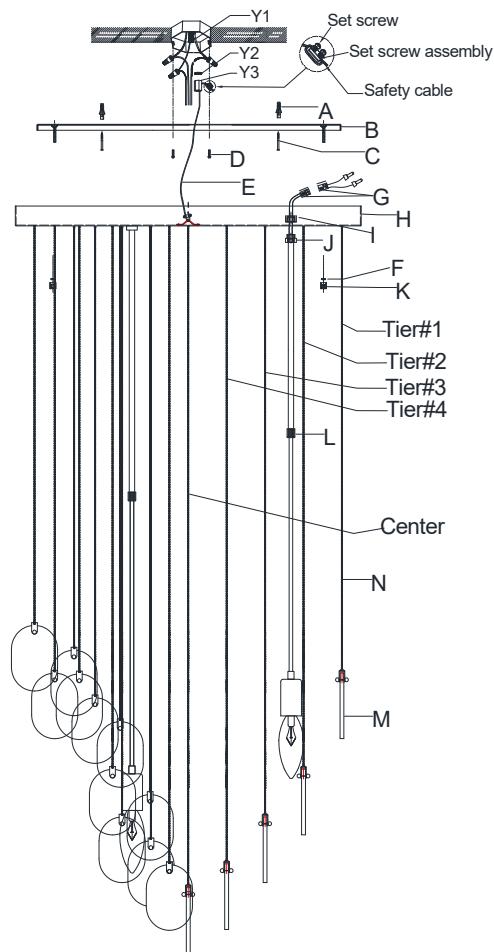

### Fig. 2

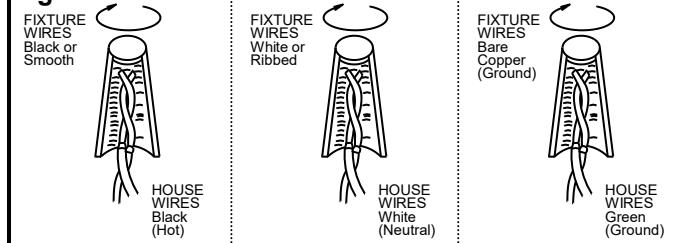

**THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX.**


# INSTALLATION INSTRUCTIONS

Item#N3678-732

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

Fig.3

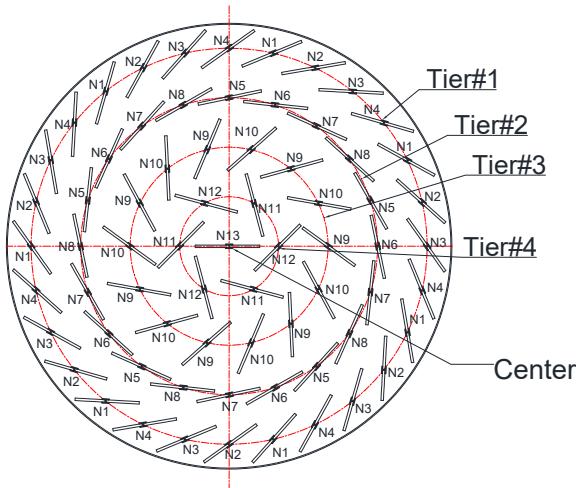

Tier#1	Tier#2	Tier#3	Tier#4	Center
2100 N1-7PCS 2160 N2-7PCS 2220 N3-7PCS 2280 N4-7PCS	2340 N5-5PCS 2400 N6-5PCS 2460 N7-5PCS	2520 N8-5PCS 2580 N9-7PCS 2640 N10-7PCS	2700 N11-3PCS 2760 N12-3PCS	2820 N13-1PCS

