

# INSTALLATION INSTRUCTIONS

Item# 12501-732 (New.10/06/2025)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION

1. Shut off the power at the circuit breaker box and, if necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

### MOUNTING THE FIXTURE (Fig. 1)

3. Position the mounting plate (B) onto the outlet box (not included) and secure it using the outlet box screws (A). Ensure that the side of the mounting plate (B) marked 'GND' is facing outward.

### CONNECTING THE WIRES (Fig. 2)

4. Connect the electrical wires as shown in Fig. 2, make sure all wire connectors are secured. If your junction box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate using the green screw provided.
5. Tuck wire connections neatly inside the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

6. Attach the back plate (D) to the mounting strap (B) and secure it with back plate screw (C)
7. Install (1) one medium base bulbs (L) up to 60 watts CFL or LED equivalent (not included) in accordance with the fixture specification.


### (DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

8. As the last step, place the glass (M) onto the insert holder area (L) according to the illustration in Fig. 1.

Your installation is now complete. Return the power to the junction box and test the fixture.

**Fig. 1**

Set # 12501-732  
-Circular Strap  
-Ground Screw  
-Mounting Screw \*2

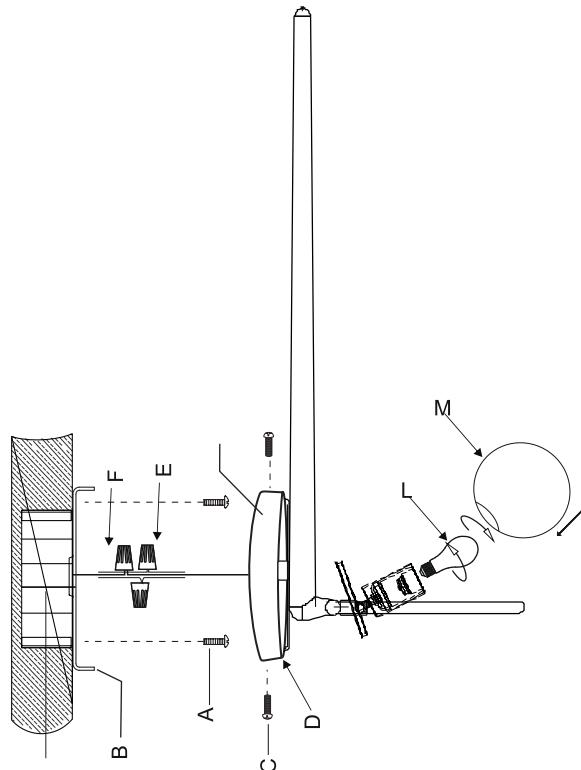

**Fig. 2**

