

INSTALLATION INSTRUCTIONS FOR

13956-870

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1) (Chandelier)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove existing fixture and its mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation. Check that all parts are included as shown in the illustration.
3. Install rod (J) and loop onto fixture (K) as shown in (Fig.1).
4. Feed fixture wire carefully through rod (J) and loop as shown in (Fig.1).

HANGING THE FIXTURE (Fig.1)

5. Thread all thread (D) into ceiling loop (G) until snug.
6. Thread other end of all thread into crossbar (A) until snug. Note: The length of all thread into crossbar may be adjusted if necessary.
7. Use lock washer and hex nut (C) to secure all thread (D) into crossbar (A).
8. Take crossbar assembly and mount to outlet box (Not included) with mounting screws (B) (Size: #8-32N*L1"). The side of crossbar marked with "GND" must face out.
9. Determine desired hanging height and use a pair of proper chain pliers to remove and discard excess chain (I).
10. Open one end of quick link (H) and attach to fixture loop and close quick link (H). Slip lock collar (F) and canopy (E) over chain (I) and allow them to rest on fixture body. Open other end of quick link (H) and attach to ceiling loop (G) and close quick link (H).
11. Carefully lace fixture's wires through chain, loop and all thread assembly.


CONNECTING THE WIRES (Fig.2)

12. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to crossbar (A) using green screw provided.
13. Tuck wire connections neatly into outlet box.
14. Raise canopy (E) onto ceiling loop (G) and secure with lock collar (F). (Fig. 1)


Fig.1

Set#
-Crossbar
-Green Screw
-Mounting Screw *2

Chain# HCH2072-898

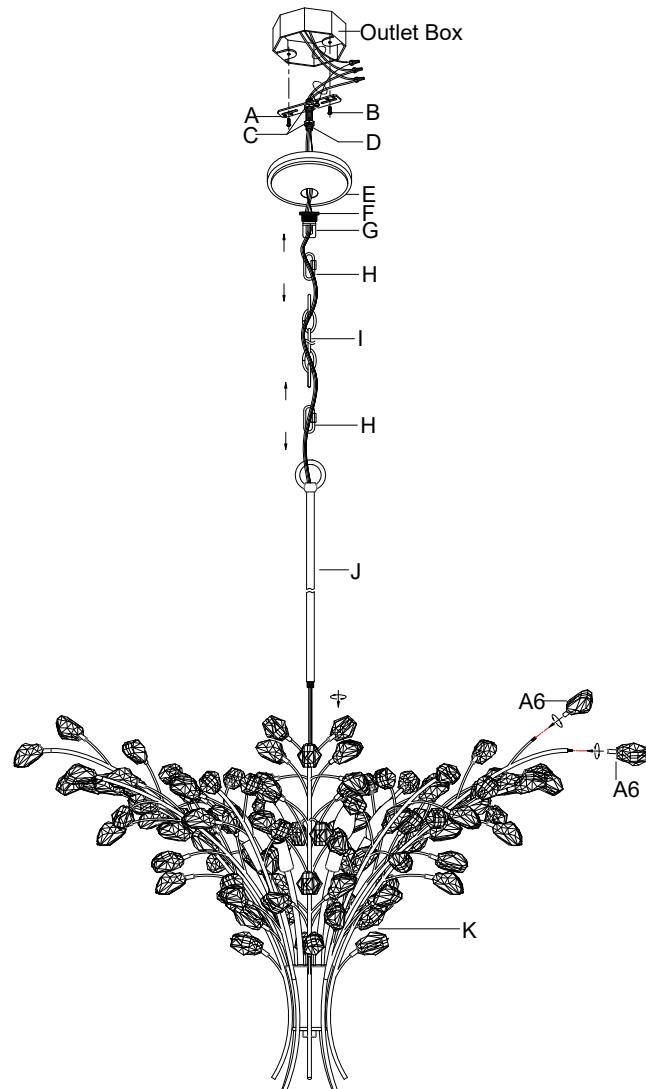

Candle Cover# CCV21048P-870



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

COMPLETING THE INSTALLATION (Fig. 3)

15. Install (4) four candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

16. Pinch the stone (A6) and position it on the fixture (K), then pinch the car parts of the stone and tighten the stone (A6).

Your installation is now complete. Return power to outlet box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

ATTENTION: You have purchased a product made with natural materials. It will exhibit naturally formed pits, voids, surface imperfections, and coloring variations not controlled by manufacturing. The appearance of natural materials can be affected by household cleansers and dirt. Please test any intended cleansers in an obscure location before applying to the visible surfaces.

Fig.2

