

**INSTALLATION INSTRUCTIONS**  
**Item#3156-77(Convertible Lamps for Pendant) (Rev. 2023/10/12)**  
**READ AND SAVE THESE INSTRUCTIONS**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

**ASSEMBLING THE FIXTURE (Fig. 1)**

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Thread fixture loop (A) onto all thread (K) until snug.
4. Install (4) four candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
5. Attach fixture arms (I) to wiring hub (G) and ring (J) using screws (H) as shown in Fig. 1.

**MOUNTING THE FIXTURE (Fig. 2)**

6. Thread all thread into ceiling loop until snug.
7. Thread the other end of all thread into the crossbar. Note: The length of all thread into the crossbar may be adjusted if necessary.
8. Use lock washer and hex nut to secure all thread into crossbar.
9. Take this crossbar assembly and mount it to ceiling outlet box (not included) with mounting screws (Size: #8-32N\*L1"). The side of crossbar marked with "GND" must face out.
10. Determine the desired hanging height and use a pair of proper chain pliers to remove and discard the excess chain.
11. Open one end of chain and attach it to fixture loop then close the chain. Slip the lock collar and canopy over the chain and allow them to rest on the fixture body. Open the other end of the chain and attach it to canopy loop then close the chain.
12. Carefully lace fixture's wires through chain. Feed fixture wires through canopy loop and crossbar assembly.

**CONNECTING THE WIRE (Fig.3)**


13. Connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided.
14. Tuck wire connections neatly into outlet box and slide canopy over ceiling loop and secure with lock collar.

**HANG THE CRYSTAL DROPS (Fig. 1)**

15. Hang crystal drops (E & C) onto fixture arms (I) as shown in Fig 1.
16. Hang crystal drop chain (D) on loop (L) as shown in Fig1.
17. Hang crystal chains (M & B) on fixture arms (I) as shown in Fig 1. (Fasten each crystal chain from beginning to end around fixture).



Your installation is now complete. Return power to the outlet box and test the fixture.

**Fig. 1**

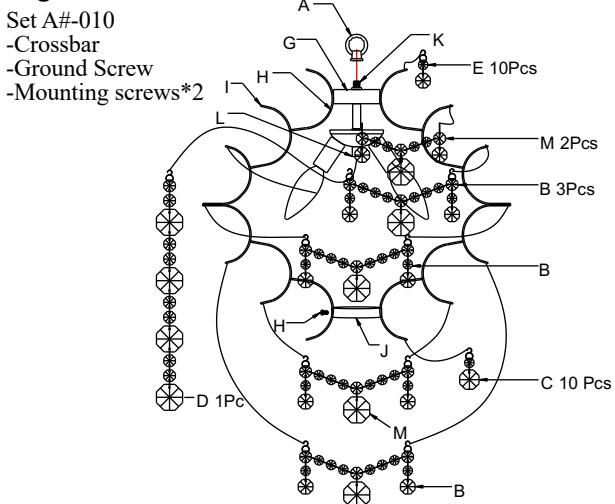

Code	Glass#	QTY/per item
M	GC3156-A	2
B	GC3156-B	3
C	GC3156-P1	10
D	GC3156-C	1
E	GC3150-A	10

**Fig. 2**

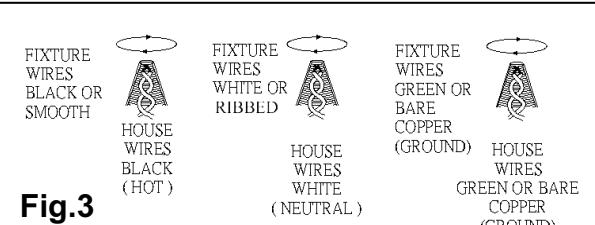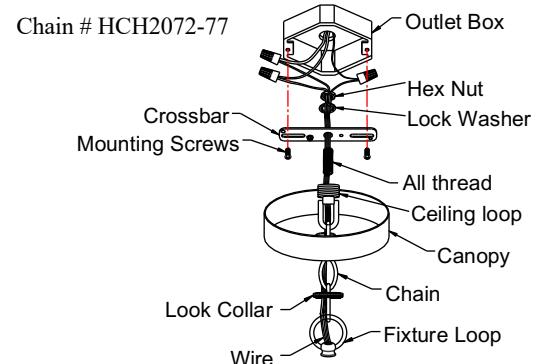

**Fig.3**



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



**american  
lighting  
association**

## INSTALLATION INSTRUCTIONS

Item#3156-77(Convertible Lamps for Semi Flush Mount) (Rev. 2022/05/10)  
READ AND SAVE THESE INSTRUCTIONS

### WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

#### ASSEMBLING THE FIXTURE (Fig.4)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Install (4) four candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. —DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).
4. Attach fixture arms (I) to wiring hub (G) and ring (J) using screws (H) as shown in Fig. 4.
5. Thread canopy (N) onto all thread (K) on top of fixture body.
6. Attach mounting plate (Q) to outlet box (not included) with mounting screws (P) (Size: #8-32N\*L0.5"). The side of the mounting plate (Q) marked "GND" and two convex points must face out.

#### CONNECTING THE WIRES (Fig.3)

7. Connect the electrical wires as shown in fig 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (Q) using the green screw provided.
8. Tuck wire connectors neatly into the outlet box.

#### COMPLETING THE INSTALLATION (Fig. 4)

9. Place canopy (N) over mounting plate (Q) and secure with screws (O).

#### HANG THE CRYSTAL DROPS (Fig.4)

10. Hang crystal drops (E&C) onto fixture arms (I) as shown in Fig.4.
11. Hang crystal drop chain (D) on loop (L) as shown in Fig.4.
12. Hang crystal chains (M & B) on fixture arms (I) as shown in Fig.4 (Fasten each crystal chain from beginning to end around fixture).

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note: Illustration (Fig. 3) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig. 4

Set# A-021-118DH

