

# INSTALLATION INSTRUCTIONS

Item#62-84 (New. 09/17/2019)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

### ASSEMBLING THE FIXTURE (Fig. 1)

3. Determine the desired hanging height and thread rods (F1, F2 and F3) to nipple of holder (G). Attach canopy (D) by screwing onto rod (F1). Carefully pass the wires through each rod during assembly. Note: remove the nipple if installing with one 6" rod only.
4. Thread screws (A) into the pre-drilled holes in the crossbar (B) spaced the same distance apart as the holes in the canopy (D).
5. Attach the crossbar (B) to the outlet box using mounting screws (C) (Size: #8-32N\*L1"). The side of the crossbar marked "GND" must face out. You can adjust the length of screws(A) by adjusting the hex nut (K) if necessary.

### CONNECTING THE WIRES (Fig. 2)

6. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided.
7. Tuck the wire connectors neatly into the ceiling outlet box and raise the canopy all the way to the ceiling.


### COMPLETING THE INSTALLATION (Fig. 1)

8. Thread screws (A) into canopy (D), and secure with knurled knobs (E).
9. Install (1) one medium base bulb (J) up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**
10. Insert the glass shade (I) into the holder (G) and secure the shade assembly by adjusting each screw (H) in the holder. Do not over tighten.

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig. 1

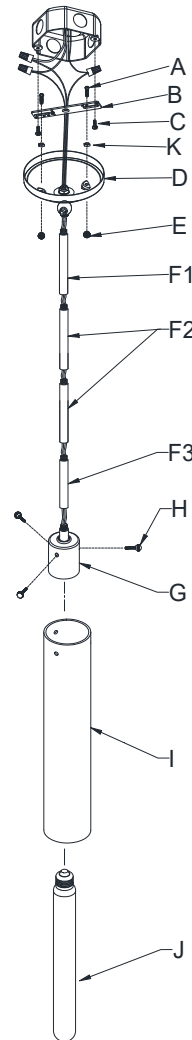

Set# A-016

-Crossbar\*1

-Ground screw\*1


-Mounting Screw\*2

Rod# W32-1-84\*1(F1)

W32-1-84\*2(F2)

W32-H-84\*1(F3)

Fig. 2

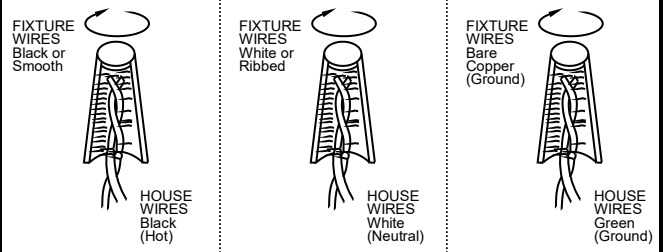

american lighting association