

INSTALLATION INSTRUCTION

Item#71163-A144, 143C-L / 71169-A144, 143C-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread two mounting screws (B) into the mounting plate (C) spaced the same distance apart as the holes in the fixture back plate. (You can adjust the length of the screws if necessary.)
4. Attach mounting plate (C) to outlet box (A) (not included) with outlet box screws (D). (Size: #8-32*0.78"L). The side of the mounting plate (C) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig. 2. Making sure that all wire connectors are secured. If your outlet box (A) has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting plate (C) using green screw provided.

COMPLETING THE INSTALLATION (Fig. 1)

6. Align back plate (G) onto mounting plate (C) and secure with two ball nuts (F) & washers (E).
7. To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. Indoor/Outdoor Silicone Sealant) to outline the outside of fixture back-plate where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig. 3).
8. Bulb information: (1 X AC LED 14W included). **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
9. Screw glass shade (I) on to metal cup (H) by twisting it clockwise as show in Fig. 1. Do not over tighten.

REPLACING LED MODULE (Fig. 4)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig. 4)

- a. Shut off the power, remove glass shade (I) by twisting it anticlockwise.
- b. Use a screwdriver to loosen the module screws (O) and remove the white plastic shade (N) & LED module (M).
- c. Loosen screws (L), remove heat transfer material (K) & glass holder (J).
- d. Un-plug the wire quick connectors and remove LED module (L) for re-lamping. (Note: The LED module should be provided by specified supplier).
- e. Reverse steps a-d for installing the new LED module.
- f. For better heat dissipation the LED module (L) should be installed with the heat transfer material (K) when re-lamping.

Your installation is now complete. Return the power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

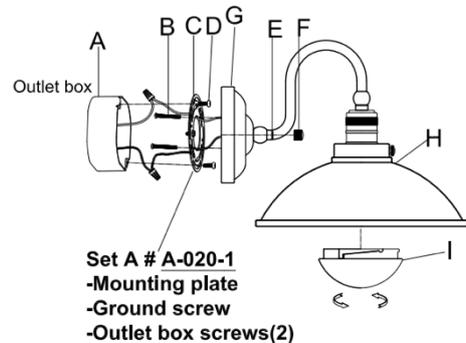


Fig. 2

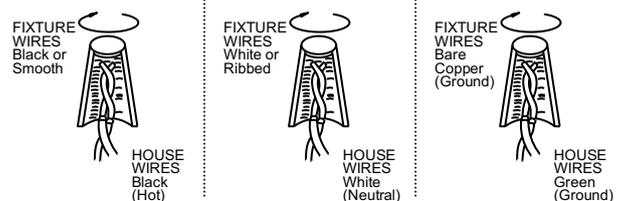


Fig. 3

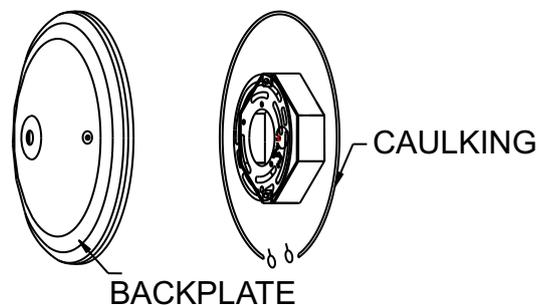


Fig. 4

