

INSTALLATION INSTRUCTIONS

Item# N1522-860

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Ensure not to misplace any small part necessary for installation.
- 3. MOUNTING THE FIXTURE**
4. To begin assembly, removing the mounting plate (A) from the back plate (E) by removing screws (D) located on top and bottom of the back plate (E).
5. Attach mounting plate (A) to the junction box (JB) (*not provided*) with junction box screws (B). The side of the mounting plate (A) with "GND" marked on it and two convex points must face out.

CONNECTING THE WIRE (Fig.2)

6. Connect the electrical wire as shown in Fig. 2, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
7. Tuck wire connections neatly into junction box (JB).
8. To mount the fixture to the wall, attach back plate (E) to mounting plate (A), align mounting holes (F) of the back plate (E) with holes of mounting plate (A), then secure with screws (D).
9. Install (2) two candelabra base bulb up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture Specifications.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

ACCESSORIES INSTALLATION (Fig. 1)

10. To begin installing the accessories unwrap the ceramic wavy disc (I) from the packing.
11. To begin installing, place the hole of the ceramic wavy disc (I) into the threaded round tube (with arrow) and secure with rubber washers provided and (G). Do not over tighten.
Note we have 4 kinds of ceramic (A,B,C,D)
12. Repeat the process until completed.

Your installation is now complete. You can now turn the power ON and test the fixture

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

MIN 75°C SUPPLY CONDUCTORS

LES FILS D' ALIMENTATION 75°C MIN.

FIG. 1

Set # A-022-101295
-Mounting Plate
-Junction Box Screw x 2
-Ground Screw

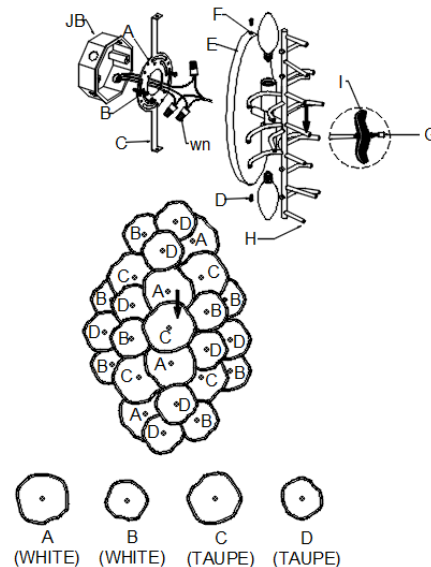


Fig. 2

