

INSTALLATION INSTRUCTIONS

Item# N1838-870

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Slip wire and safety cable into threaded stems (J) and (K) and fixture loop (I).
4. Thread the stems (K) and (J) and fixture loop (I) onto coupler of the frame.
5. Connect all stem hook (L) on the top layer and middle layer of the frame.
6. Connect all stem hook (L) on the middle layer and bottom layer of the frame.

HANGING THE FIXTURE (Fig.2)

7. Installed $\frac{1}{4}$ IPS (nipple) pipe "not provided" with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown. Thread hickey (A) on the $\frac{1}{4}$ IPS pipe and tighten with hex nut (C).
8. Secure the hex nut (C) and washer (B) onto all thread (D), then thread all thread (D) into the hickey (A); and secure with hex nut (C) and washer (B) on the other end of all thread (D).
9. Thread ceiling loop (E) onto all thread (D) tightly. The all thread length maybe adjusted if necessary
10. Determine the desired hanging height and discard the other stems.
Note: 1x quick links (H) is provided and must be attached to fixture loop (I) and ceiling loop (E).
11. Open the quick link (H) and connect to fixture loop (K), then close the quick link (H). Slip collar ring (G) and canopy (F) then allow canopy (F) to rest on the top of fixture loop (I) and connect to ceiling loop (E), then close the quick link (H).
12. Feed the fixtures wires and safety cable through ceiling loop (E) and all thread (D) then allow them to exit through the side open holes of hickey (A).
13. Run safety cable through hickey (A) open hole and secure safety cable with set screw assembly and set screw.

CONNECTING THE WIRE (Fig. 3)

14. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it.
15. Tuck wire connections neatly into junction box (JB) Fig 2.
16. Raise the canopy (F) over ceiling loop (E) and secure with collar ring (G)

ACCESSORIES INSTALLATION (Fig. 1)

17. To begin installing the accessories unwrap the accessories strands (N) and accessories strand (O) from the packing.
18. Place the pin of the first accessories strands (N) into the hole of the frame then the first strand of accessories strand (O).
19. Repeat the process until completed.

FINISHING THE FIXTURE

20. Install (11) eleven candelabra base bulbs up to 60 watts each of CFL or LED equivalent (not included) in accordance to fixture specifications.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

WARNING: This luminaire must be mounted or supported independently of an outlet box.

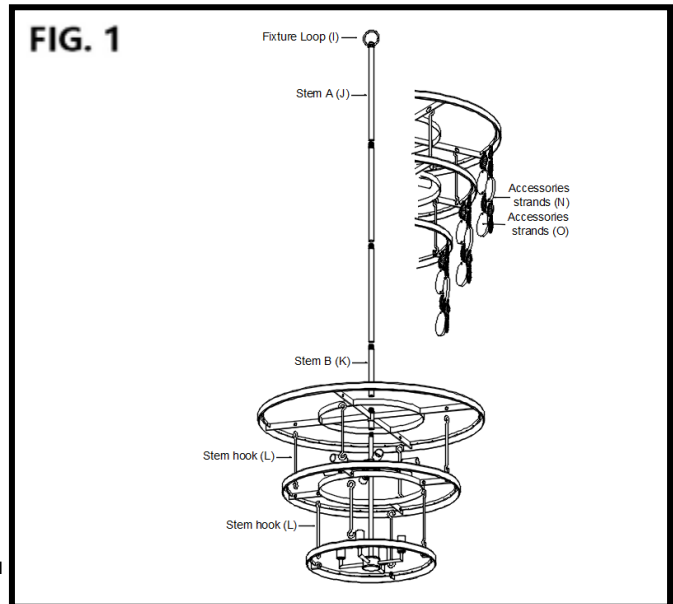


FIG. 2

