

INSTALLATION INSTRUCTIONS

Item#N3127-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (B) on ceiling and mark location of two plastic anchors (A). Pre-drill holes for plastic anchors (A). Insert plastic anchors (A) into ceiling.
4. Decide the preferred hanging height and choose the correct length of chain (J) needed. Feed fixture wire up through the rod (L) and fixture loop(K), screw the rod (L) and fixture loop(K) onto all thread of frame(M).
5. Attach one quick link (I) to the fixture loop (K) and one end of chain (J). Weave fixture wire through chain links. Feed the fixture wires through the canopy loop (H) and canopy (G). Then connect another end of chain (J) to canopy loop (H) with another quick link (I).
6. Install a 1/4" IPS pipe (Y1) (not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown.
7. Secure the hex nut (Y2) onto the pipe (Y1) and then secure the hickey (Y3) tightly.
8. Feed the fixtures wires and safety cable (E) through the mounting plate (C) and allow safety cable (E) to exit through the side of hickey (Y3). Run safety cable (E) through the hickey (Y3) one circle and secure safety cable (E) with set screw assembly and set screw
9. Attach mounting plate (B) to the junction box (not included) with mounting screws (D) (Size: #8-32N*L1/2") and wood screws (C) into plastic anchors (A). The side of the mounting plate (B) with "GND" marked on it and two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

10. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting plate (B) using green screw provided.

11. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

12. Carefully raise the canopy(G) up to ceiling, secure with cap nuts (F).
13. Install (8) eight candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
14. Starting from Tier#1, hook the glass (N) onto the spoke of frame(M). Then hook glass (N) onto Tier#2.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX.

Fig.1

Set#A-020-400100

- Mounting plate
- Ground screw
- Junction box screws(2)
- Wood screws(2)
- Plastic anchor(2)
- Chain#HCH2072-732


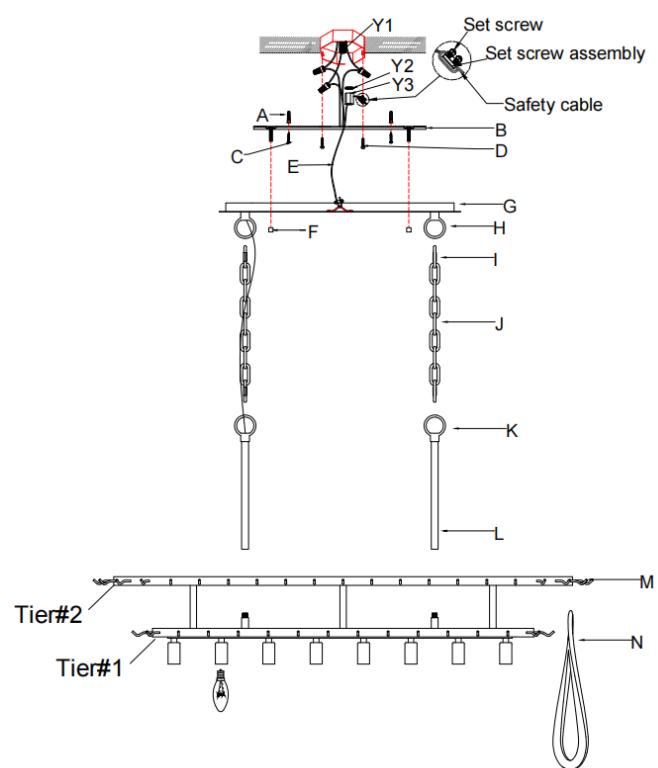


Fig. 2



Notice: It is important to use proper chain pliers (not included)

To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

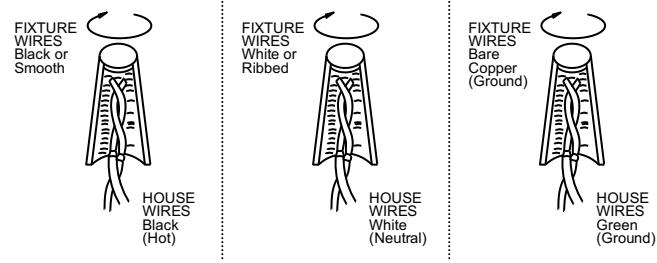

Intertek

