

# INSTALLATION INSTRUCTIONS

Item#N3149-MX-732

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Install a 1/4" IPS pipe (B) (not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box (not included) as shown.
4. Secure the hex nut (C) onto the pipe (B) and then secure the hickey (E) tightly.
5. Thread nipple (F) into hickey (E) and tighten with hex nut (C), then thread ceiling loop (G) on the other end of nipple (F) and secure with hex nut (C). The length of nipple (F) maybe adjusted if necessary.
6. Decide the preferred hanging height and choose the correct length of rods(L,M,N and O) needed. Pass fixture wire up through the rods(L,M,N and O) and fixture loop (I),screw the rods(L,M,N and O) onto all thread (P)of frame(Q).Screw fixture loop (I) onto the end of last rod.
7. Slip the collar ring (K) and canopy (J) down over end of rods.
8. Raise the fixture up to the ceiling, then connect the fixture loop(I) to ceiling loop (G) with quick link(H).
9. Feed the wires carefully through the quick link(H), ceiling loop (G) and nipple (F), and allow them to exit through the side of hickey (C). Run safety cable through the hickey (C) one circle and secure safety cable with set screw assembly and secure with set screw provided

### CONNECTING THE WIRES (Fig. 2)

10. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it.
11. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

12. Carefully raise the canopy(J) up to ceiling, screw with collar ring(K).
13. Install (15) fifteen candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
14. Glass installation: First attach glass (D) onto the bottom center of the fixture, then attach glass (A/B/C/D/E/F) onto the frame (Q) from Tier#1 to Tier#4 as shown in Fig.3.


Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**


Page:1/2

**Fig.1**

Rod#W39-5H-732(6")  
Rod#W39-5-732(12")

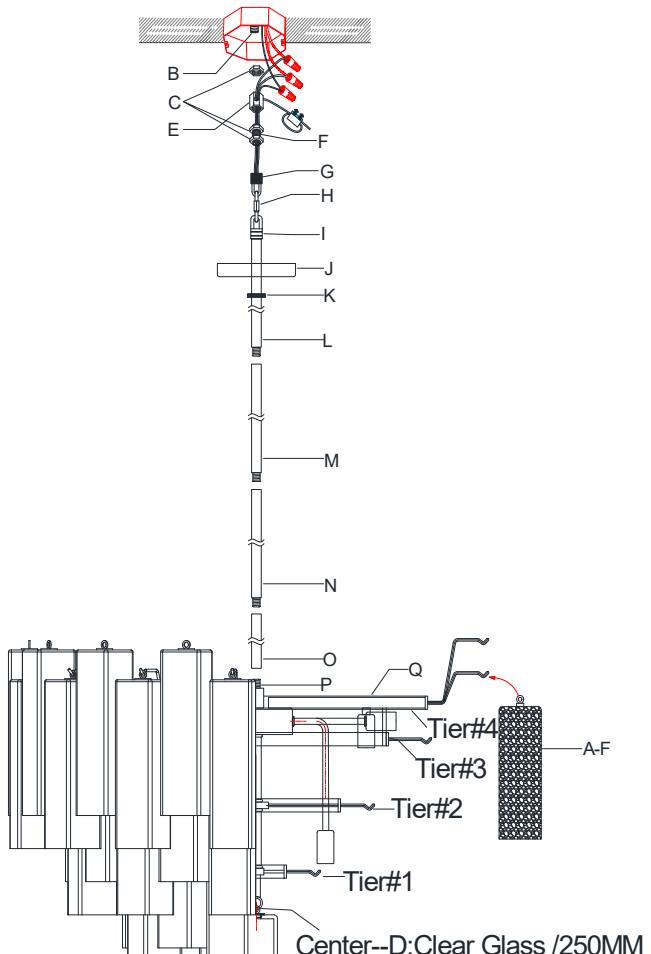

**Fig. 2**

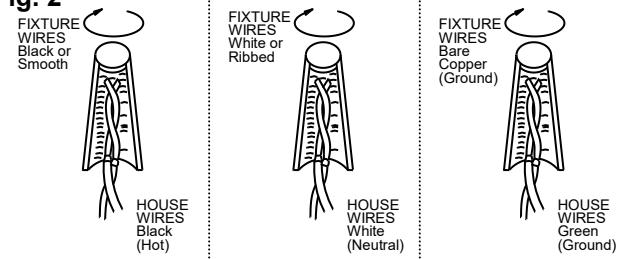

**THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX.**



# INSTALLATION INSTRUCTIONS

Item#N3149-732 / N3149-GS-732


**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**


Fig.3

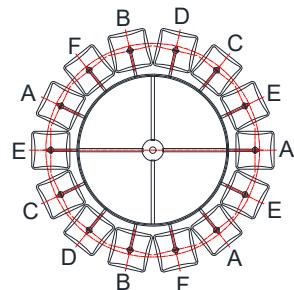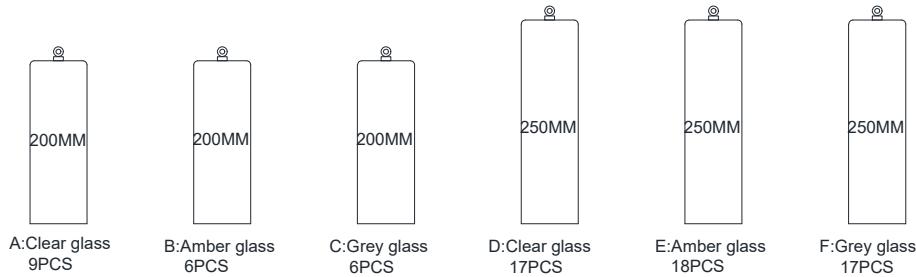


Tier#2



Tier#1

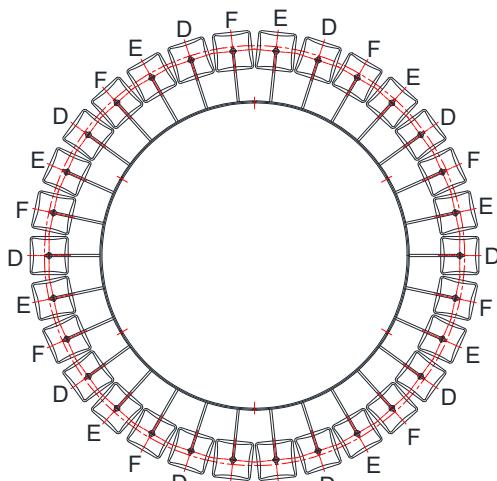

Tier#4

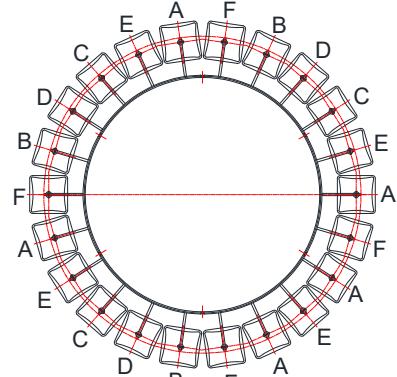

Tier#3

