

# INSTALLATION INSTRUCTIONS

Item#N3447-XXX-L

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Adjust the arms to proper position as shown in Fig.1.
4. Decide the preferred hanging height and choose the correct length of rods (H,I,J and K) needed. Pass fixture wire up through the rods (H,I,J and K), screw the rods (H,I,J and K) onto all thread (L) of frame (M).
5. Slip the collar ring (G) and canopy (F) down over end of rods.
6. Screw the swivel (E), nipple (C) and crossbar (A) onto last rod. The length of nipple(C) into crossbar(A) maybe adjusted if necessary.
7. Attach crossbar (A) to the junction box (not included) with mounting screws (B) (Size: #8-32N\*L1/2"). The side of the crossbar (A) with "GND" marked on it and two convex points must face out.

### CONNECTING THE WIRES (Fig. 2)

8. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the crossbar (A) using green screw provided.
9. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

10. Carefully raise the canopy(F) up to ceiling, screw with collar ring(G).
11. Install (12) twelve xenon G9 base bulbs 50 watts each or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
12. Attach flower glass (N) to the socket cup and tighten with socket ring (O) by using socket spanner (P) provided. Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

### Fig.1

Set #A-010-C



-Crossbar

-Mounting screws(2)

-Ground screw

Rod#W30-H-732/899(6")

Rod#W30-1-732/899(12")

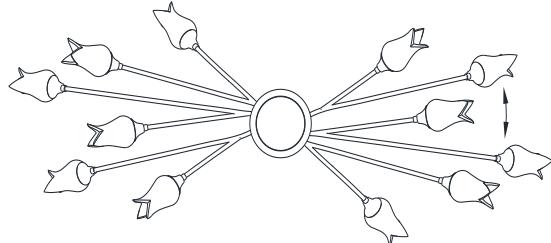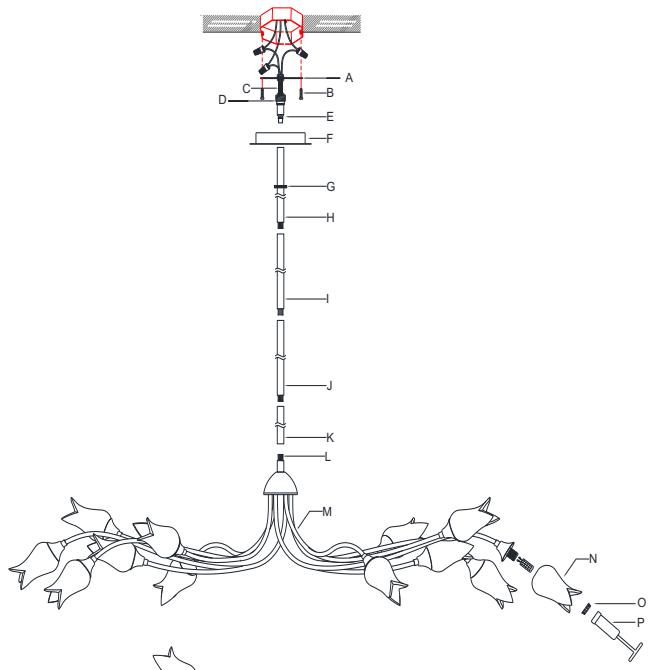

### Fig. 2

