

# INSTALLATION INSTRUCTIONS

Item#N3507-860

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (B) over ceiling and mark location of four holes on mounting plate (B) where plastic anchors (A) will be inserted. Drill holes into ceiling and insert plastic anchor (A).
4. Attach mounting plate (B) to the junction box (not included) secure with mounting screws (D) (Size: #8-32N\*L1/2"). The side of the mounting plate (B) with "GND" marked on it and two convex points must face out. And install the four wood screws (C) into the plastic anchors(A).
5. Determine the desired hanging height and select the correct rods(J,K,L and M). Pass the fixture wire through the rods(J,K,L and M) and fixture loop (G),screw the rods(J,K,L and M) onto the frame(N),screw the fixture loop (G) onto top of last rod.
6. Feed the wires carefully through the quick link(H), ceiling loop (G) and canopy (F).Connect the fixture loop(G) to ceiling loop on canopy (F) with quick link(H).
7. The support cable (E) is provided to support weight of fixture while wiring. Align fixture to mounting plate(B) and attach hook on the end of support cable (E) into a slot located on mounting plate(B). Carefully allow support cable (E) to support weight of fixture while wiring.

### CONNECTING THE WIRES (Fig. 2)

8. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting plate (B) using green screw provided.
9. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

10. Carefully raise fixture up to ceiling, secure canopy (F) to mounting plate (B) with cap nuts (I).
11. Install (10) ten candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
12. Screw glass shade (O) onto the frame (N). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**Fig.1**

Set#A-020-240110

-Mounting plate

-Ground screw


-Mounting screws(2)

-Wood screws(4)




-Plastic Anchors(4)

Rod#W30-H-732(6")

Rod#W30-1-732(12")

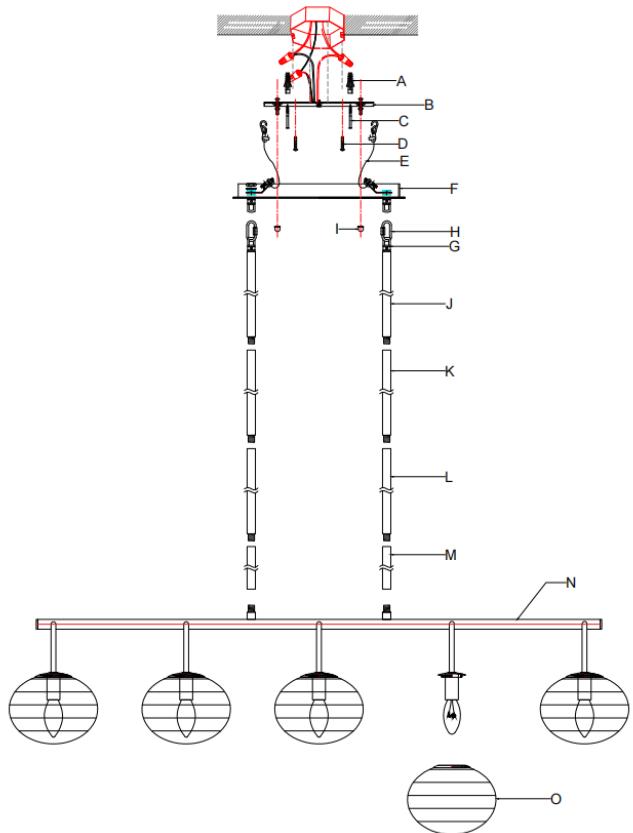

**Fig. 2**



american  
lighting  
association