

INSTALLATION INSTRUCTIONS

Item#N3675-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (B) over ceiling and mark location of eight holes on mounting plate (B) where plastic anchors (A) will be inserted. Drill holes into ceiling and insert plastic anchor (A).
4. Attach mounting plate(B) to the junction box (not included) with mounting screws (D) (Size: #8-32N*L1/2"). The side of the mounting plate (B) with "GND" marked on it and two convex points must face out. And install the eight wood screws (E) into the plastic anchors(A).
5. The support cable (F) is provided to support weight of fixture while wiring. Align fixture to mounting plate (B) and attach hook (C) on the end of support cable (F) into a slot located on mounting plate(B). Carefully allow support cable (F) to support weight of fixture while wiring.

CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting plate (B) using green screw provided.
7. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

8. Raise fixture up to ceiling, align the holes of canopy(G) with the screws on the mounting plate (B), then secure with cap nuts (L).
9. Install (5) five candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
10. Starting from the center, attach the chain (H8-H1) to the hook on the canopy (G) as shown in Fig.1& Fig.3. Then attach the alabaster (J) on end of the chain (H8-H1) as shown in Fig.1& Fig.3.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

Set#A-030-500D

- Mounting plate
- Ground screw
- Mounting screws(2)
- Wood screws(8)
- Anchors(8)


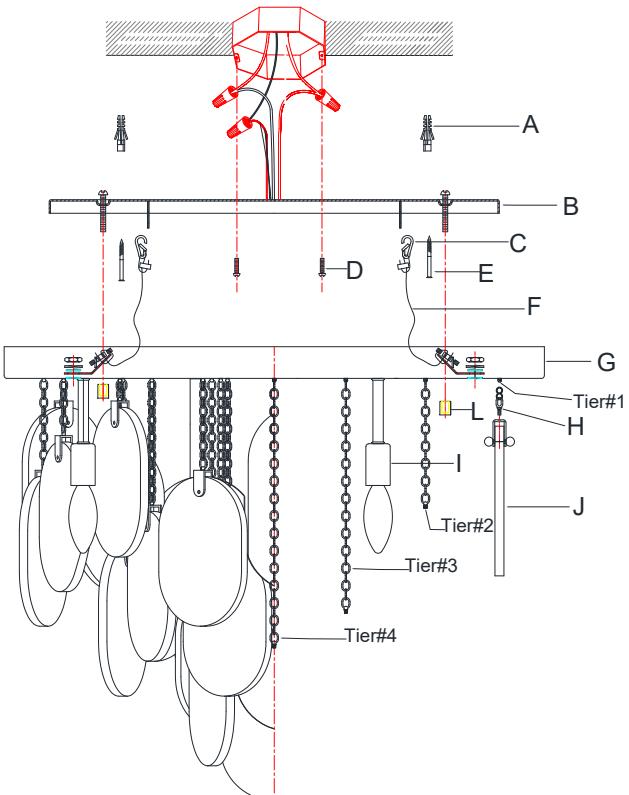


Fig. 2

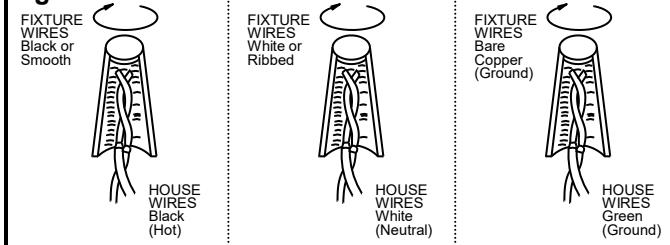


INSTALLATION INSTRUCTIONS

Item#N3675-732

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

Fig.3

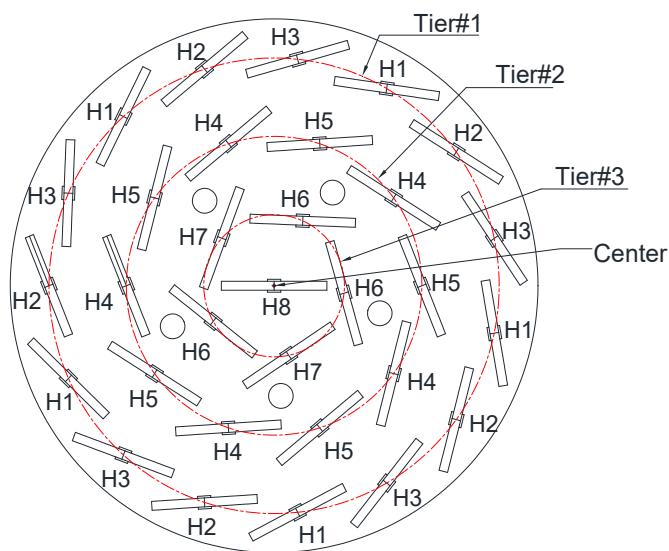

Tier#1	Tier#2	Tier#3	Center
H1: 5PCS H2: 5PCS H3: 5PCS	H4: 5PCS H5: 5PCS	H6: 2PCS H7: 3PCS	H8: 1PCS



american
lighting
association

Intertek