

# INSTALLATION INSTRUCTIONS FOR P5041-XXX

## For Wall Mount Fixture

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**  
**AVERTISSEMENT ! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION

1. Shut off power at the circuit breaker and remove the old fixture and mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

### MOUNTING THE FIXTURE (FIG. 1)

3. Secure the circular strap to the junction box (not provided) with the mounting screws. The side of the circular strap marked "GND" must face out.

### CONNECTING THE WIRES (FIG. 2)

4. Connect the electrical wires as shown in Fig. 1, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap or using the green screw provided.
5. Tuck the wire connections neatly into the wall junction box. Place the canopy over the circular strap and secure with canopy screws provided.

### COMPLETING THE INSTALLATION

6. Install (1) one medium base T10 bulb up to 60 watts each or CFL or LED equivalent. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
7. Place the glass over the socket and secure by turning clockwise. Do not over tighten.

Return the power to the junction box and test the fixture. Your installation is now complete.

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

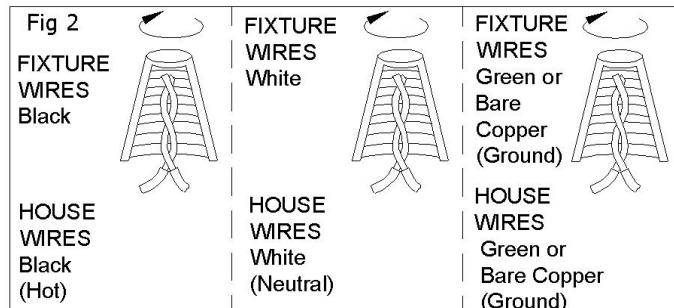


Fig.1

