

INSTALLATION INSTRUCTIONS

Item# 6101-xxx

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Loosen lock nut (G) to remove from mounting screw (K). Thread two mounting screws (K) into the mounting plate (H) spaced the same distance apart as the holes in the fixture back plate. (You can adjust the length of the screws with hex nuts (L) if necessary.)
4. Attach mounting plate (H) to Junction box (Not included) using outlet box screws (I) (Size: #8-32N*L1"). The side of the mounting plate (H) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in (Fig.2). Making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (H) using green screw (J) provided.
6. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

7. Placing the fixture body to the wall by aligning the protruding mounting screw (K) all the way through the mounting plate (H) and tighten the fixture body by using 2 lock nuts (G). Fasten the fixture until held firmly against the wall.
8. Place the large glass shade (E), round ring (D), small glass shade (C) and socket ring (B) order over the socket (F). Then secure with socket ring (B) by using socket ring tool (A) provided. Do not over tighten.
9. Install (1) one medium base bulb up to 100 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig. 1

Set# A-020

- Mounting Plate*1
- Ground Screw*1
- Mounting Screw*2
- Outlet Box Screw*2


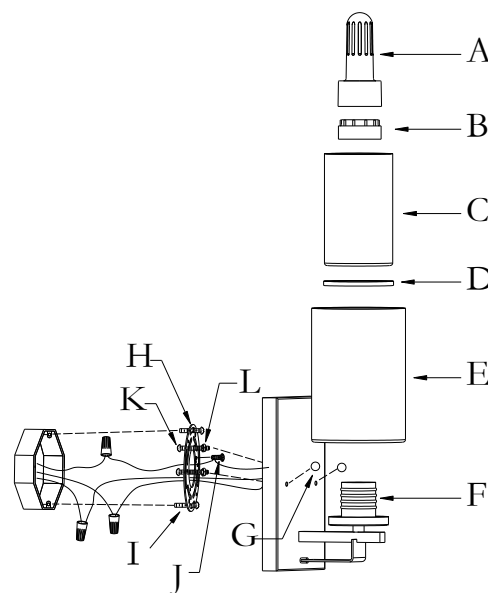


Fig. 2

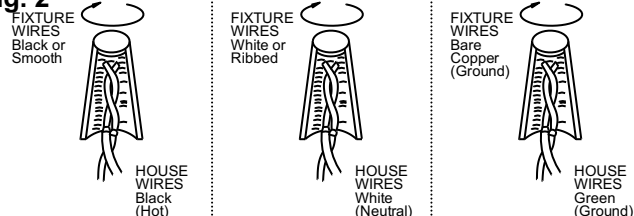

american
lighting
association