

INSTALLATION INSTRUCTIONS


Item#8106-A138-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Pull the black, white and ground wires out of post (C).
4. Next, connect electrical wires while supporting the lantern as shown in (Fig.2). If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the post. Align the lantern with post and secure Bottom Assembly (A) with Screws (B) (Fig.1 & 2).
5. Bulb (D) information: (1 X AC LED 12W included.) **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!)** **(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Fig. 1

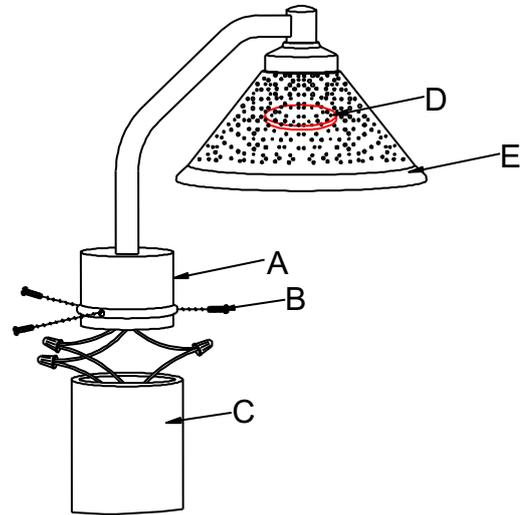


REPLACING LED MODULE (Fig.3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig.3)

- a. Shut off the power.
- b. Loosen screws (B) and remove fixture body from post. Disconnect the wire connectors and place fixture body on a clean surface.
- c. Unscrew the screws (M) and remove the plastic bushing (N), glass shield (J).
- d. Press the button of the printed "L" quick connector on LED module (D) with a pin (not included) to disconnect the black wire and then disconnect the white wire from the printed "N" quick connector on LED module (D).
- e. Remove the screws (K) and washer (I) then remove the LED module (D) carefully.
- f. Reverse steps b-e for installing the new LED module.

Fig. 2

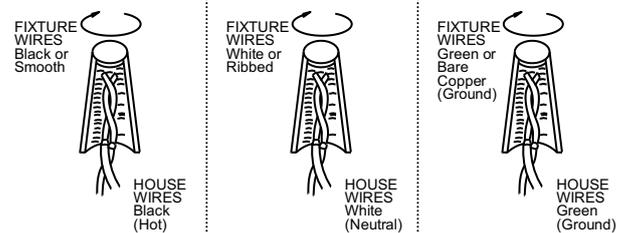

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 3

