

Item#N2214-732 / N2214--A732

**READ AND SAVE THESE INSTRUCTIONS**

Item#N2214-732 / N2214--A732

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Carefully push fixture wires from top of fixture up through the rod (F), screw the rod (F) onto all thread (G) of the frame (H). Pass the fixture wires through canopy (D), screw it on the end of the rod(F).
4. Attach mounting plate(A) to the junction box (not included) and secure with mounting screws (C) (Size: #8-32N\*L1/2"). The side of the mounting plate (A) with "GND" marked on it and two convex points must face out.

## CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting plate(A) using green screw provided.
6. Tuck wire connectors neatly into the junction box.

## COMPLETING THE INSTALLATION (Fig. 1)

7. Raise fixture up to ceiling, align the holes of canopy(D) with the screws(B) on the mounting plate(A), then secure with cap nuts (E ).
8. Install (5) five candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. Attach glass (I) onto the frame (H) with cap nuts (K) and Washer(J) provided.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

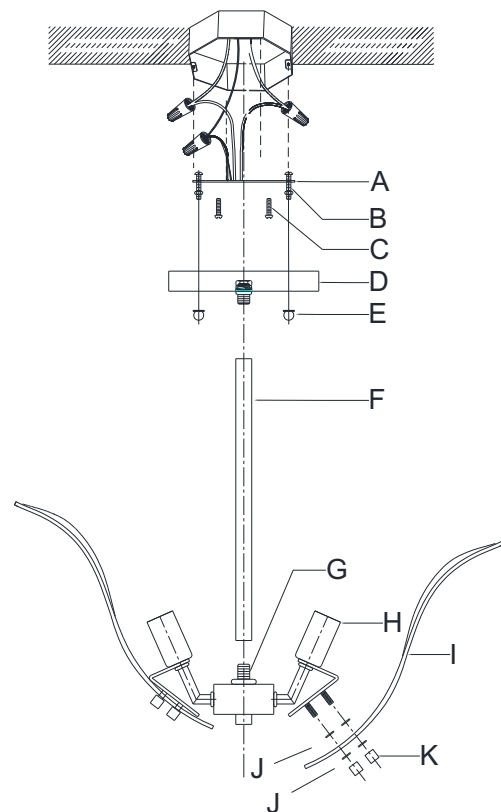
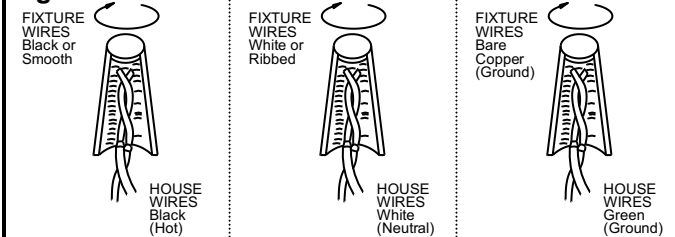
**Fig.1**

Set#A-020

-Mounting plate

-Ground screw

-Mounting screws(2)

**Fig. 2**

american  
lighting  
association