

INSTALLATION INSTRUCTIONS

Item#N3527-736

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Feed fixture wire up through the stem (G), screw the stem(G) onto frame(H).
4. Slip the collar ring(F) and canopy (E) down over the stem(G). Screw nipple (C) and crossbar(A) into collar screw(D).
5. Attach crossbar (A) to the junction box (not included) with mounting screws (B) (Size: #8-32N*L1/2"). The side of the crossbar (A) with "GND" marked on it and two convex points must face out. The length of nipple(C) into crossbar(A) maybe adjusted if necessary. You may adjust the canopy to one side when installation.

CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the crossbar (A) using green screw provided.
7. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

8. Carefully raise the canopy(E) up to ceiling, screw with collar ring(F).
9. Install (11) eleven candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

The fixture is handmade, please adjust the leaf to proper position if necessary

Fig.1

Set#A-012-46B

-Crossbar

-Ground screw

-Mounting screws(2)

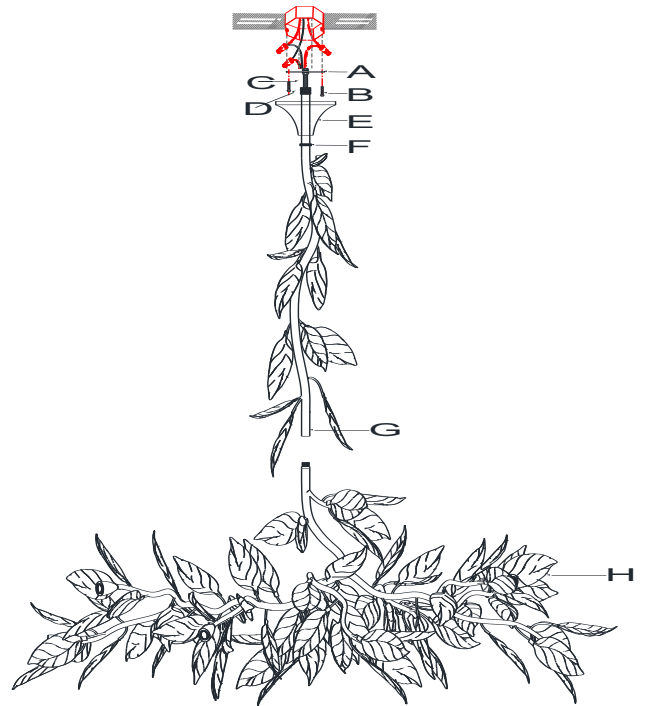


Fig. 2

