

INSTALLATION INSTRUCTIONS

Item# 13105-855 (New. 2025/09/07)
READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

VERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Install All Extensions Rods (D) one by one with Rod Connectors (E) onto fixture body (L) as shown in (Fig 1).
4. Determine the hanging length of the Fixture (L). Attach the Extension Rods (D) according to the height needed.
5. Pull the cord wire through the connecting Extention Rods (D) and pull the wire out from the back of the canopy (A).
6. Attach mounting plate (B) to outlet box (Not included) using mounting screws (H). The side of mounting plate (B) marked with GND must face out.

CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (B) using green screw (J) provided
8. Tucking the wire in the Junction Box.
9. Hang the Fixture (L) on the ceiling loop (F2) by the Quick link (G2).
10. Raise canopy (A) and secure with Quick Link (G2).
11. Install the canopy via canopy screw (I).

FINISHING THE INSTALLATION (Fig.1)

12. Install (1) one A19 base bulb (K) up to 100 watt each or CFL or LED equivalent (not included) in accordance with the fixture specification — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

- 1 Canopy (A)
- 1 Mounting Plate (B)
- 3 Wire Connectors (C)
- 4 Extension Rods 12" 3 / 6" 1 (D)
- 4 Rods Connectors X 3 (E)
- 1 Ceiling Loop (F2)
- 1 Fixture Loop (F1)
- 1 Quick Link (G1)
- 1 Quick Link (G2)
- 2 Mounting Screws (H)
- 2 Canopy Screws (I)
- 1 Green Screw (J)
- 1 Bulb (K) (Not Included)
- 1 Fixture Body (L)


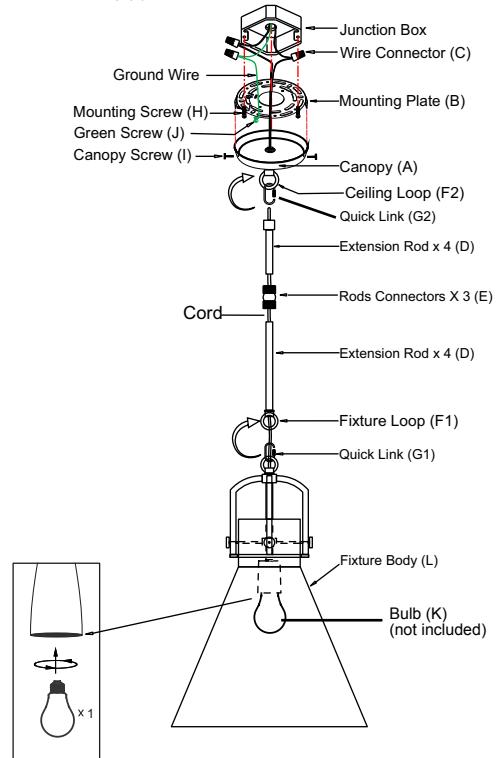


Fig. 2

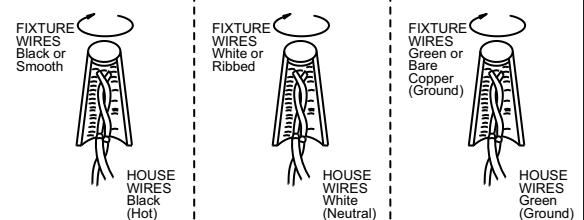

american
lighting
association

UL
LISTED