

# INSTALLATION INSTRUCTIONS

Model# 78602-899/ 78603-899

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (B) on wall and mark location of four holes on mounting plate where plastic anchors (M) will be inserted. Drill holes into wall and insert plastic anchors (M).
4. Attach mounting plate (B) using outlet box screws (C) to outlet box (A) (not included). The side of mounting plate marked "GND" must face out. Then secure wood screws (N,4pcs) into plastic anchors (M). (Fig 1)

## CONNECTING THE WIRES (Fig. 2)

5. Connect electrical wires as shown in Fig.2 with connectors (E), making sure that all wire connectors are secured. If your outlet box (A) has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (B) using green screw (D) provided.
6. Tuck wire connectors neatly into the outlet box (A).

## COMPLETING THE INSTALLATION (Fig. 1)

7. Loosen screws (L,2pcs) and separate upper cover (K) from fixture body.
8. Install (2) two candelabra base bulb (I) up to 60 Watts, or CFL or LED equivalent (not included), in accordance with the fixture specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. Secure upper cover (K) to the fixture body by using screws (L,2pcs) until tight.
10. Secure the back plate (F) to the mounting plate (B) using mounting screws (G,4pcs) and plastic washers (H) until tight.
11. To prevent moisture from entering outlet box (A) and causing a short, use clear silicone sealant to outline outside of fixture back plate (F) where it meets the wall leaving a space at bottom to allow moisture a means to escape. (Fig.3)
12. This fixture is ETL listed for wet location applications.


Your installation is now complete. Return power to the outlet box and test the fixture.




**"CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR"**

**ATTENTION - RISQUE D'INCENDIE, CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.**

**Fig. 1** Mounting Plate (1) (Part#A-020-185300)  
Candle cover (4)  
Ground Screw (1)  
Mounting Screws (4)  
Wood Screws (4)

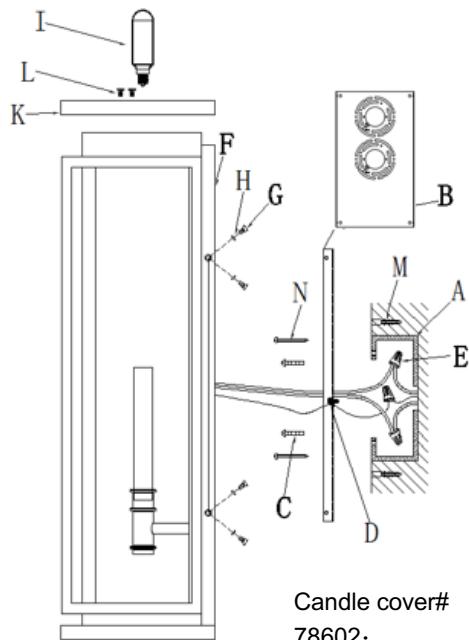

Candle cover#  
78602:  
CCV21157P-899/44  
78603:  
CCV21086P-899/44

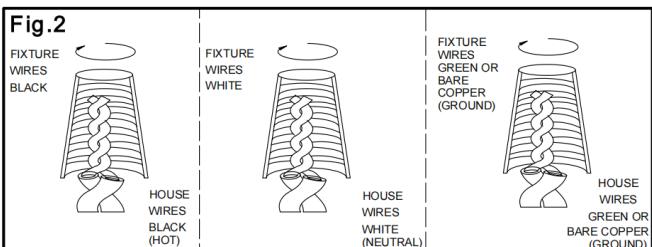

**Fig 3**

